

# I-TRAP 40 HT

[www.insect-trap.net](http://www.insect-trap.net)



**The discrete 40 m<sup>2</sup> short  
circuit proof insect control unit**



# I-TRAP 40 HT

## i-trap 40 HT short circuit proof system.

With its innovative design, the i-trap 40 HT is recommended for use in offices, non-food shops and non-food warehouses.


The unit is constructed in such a way that the UV-A light emission is 360 degrees around the unit. The i-trap 40 HT has an all metal housing and uses a powerful UV-A lamp

to lure insects into its trap. Once the insects are inside the unit, they will be effectively controlled by means of a high tension grid.

*Easy to service, powerful and safe to use; the i-trap 40 HT offers it all.*

## 10 reasons to start using the i-trap 40HT unit:

1. Multiple mounting positions: wall mounted, ceiling mounted or free standing.
2. Unit can be used in a wide variety of applications.
3. Short circuit proof high tension grid offers heavy duty performance; TUV approved.
4. Metal housing offers durability.
5. Effective coverage of areas up to 40 m<sup>2</sup>.
6. Easy to service with direct access to lamp and high tension grid.
7. Meets ISO 9001 / RoHS & the CE standard.
8. 30% improved performance over conventional units due to its unique attraction grid, which reflects the light onto the landing spot thereby stimulating the landing behavior of flying insects.
9. High powered effective UV-A lamp.
10. 2 year full guarantee on the mechanical aspects.

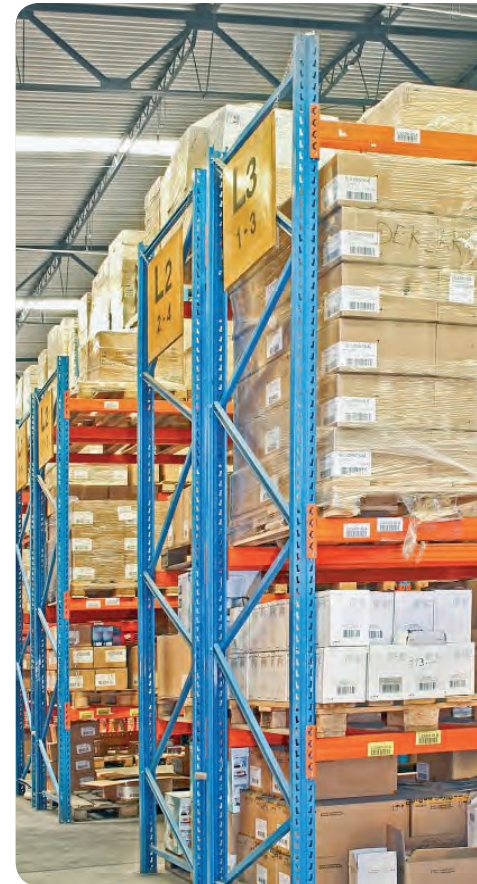

## Technical specifications

Area coverage	: 40 m <sup>2</sup> effective coverage
Light source	: 1 x 22 Watt UV-A lamp
Type of UV lamps	: UV-A Lamp RoHS certified
Electrical supply	: 220-240V ~ 50 Hz, other voltages upon request
Catch specifications	: By means of short circuit proof high tension grid
Power consumption	: 35 Watt
Weight	: 5 Kg
Material	: Metal housing
Degree of protection	: IP 21 (drip proof)
Guarantee	: 2 year return to base
Int. building norm	: acc. IEC 60.335-259 int. standard for insect exterminators
Lamp life time	: 9000 hrs
Dimensions (LxWxD)	: 370 x 370 x 140 mm
CE-approval	: Yes
Mounting position	: Wall mounted, ceiling mounted or free standing
Cable & plug	: Included
Packaging	: Strong cardboard box included
Manual	: Enclosed with the unit in English
Service	: Unit can be serviced without special tools