



I-TRAP 80 LED

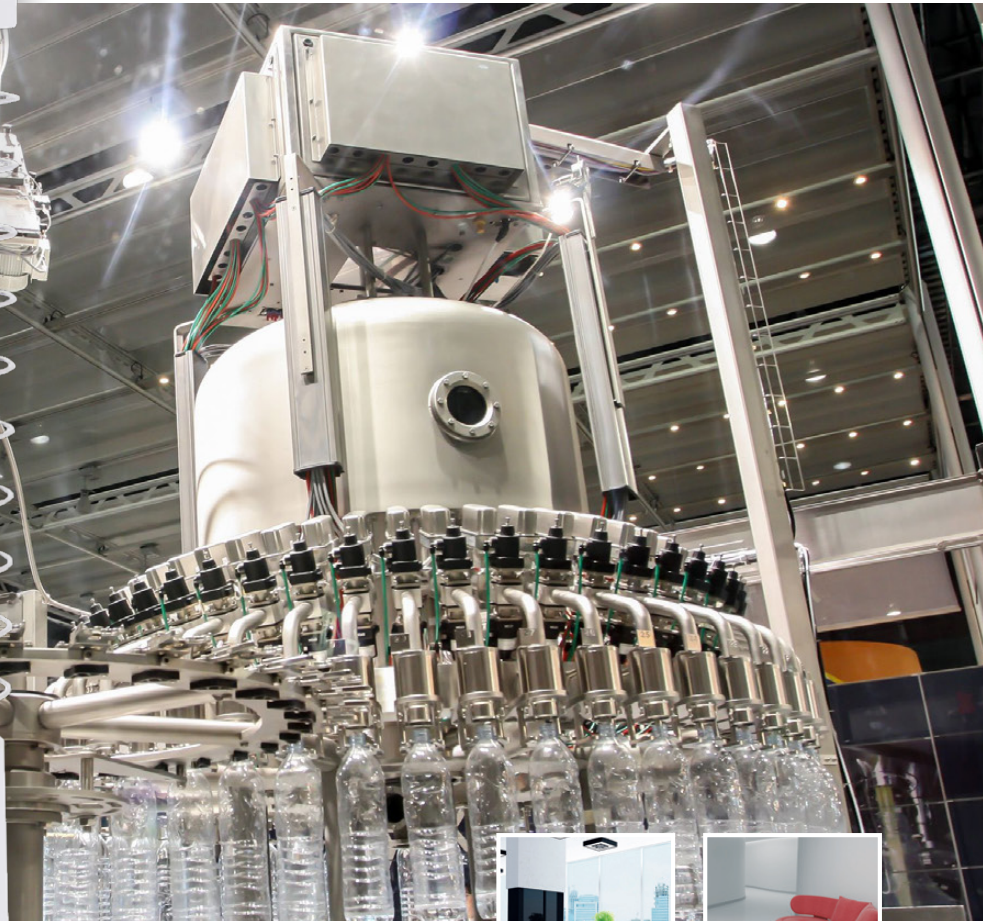

The discreet 120 m² wall mounted insect control unit

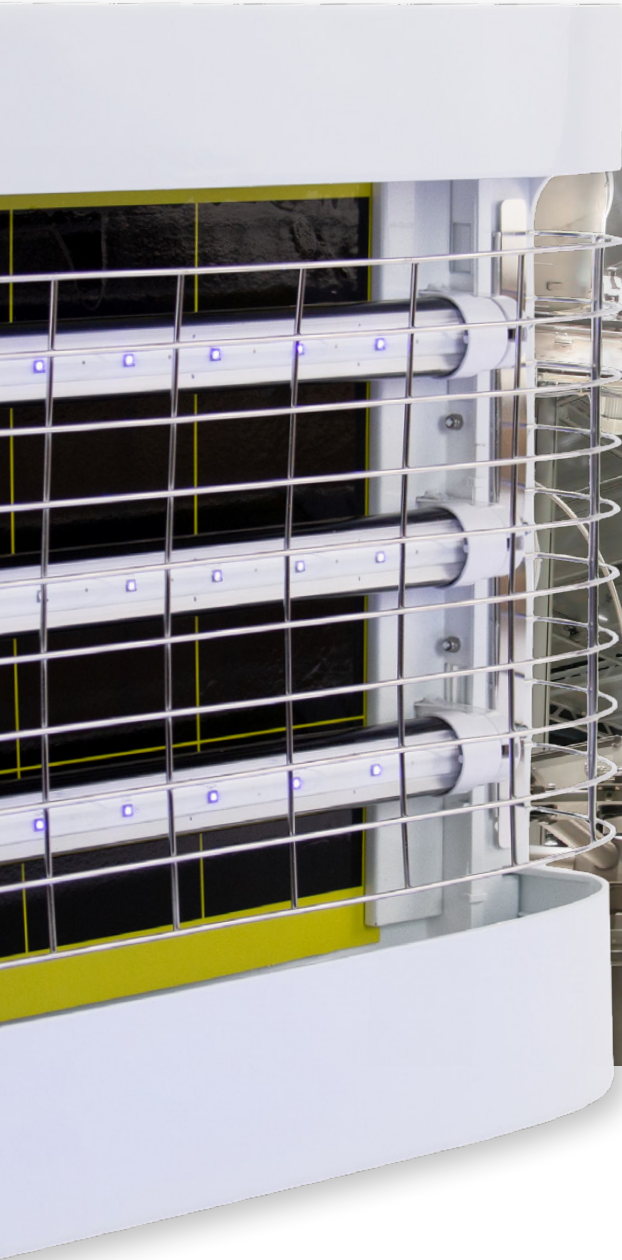

I-TRAP 80 LED

i-trap 80 LED wall mounting system.

With its innovative design, the i-trap 80 LED is recommended for use in offices, shops and restaurants.

The i-trap has a specially designed front grid which optimizes the attraction potential.

The cover/grid and the casing are made of coated steel. Once the insects enter the i-trap, they will be effectively controlled by means of a centrally placed glue board.

Easy to service, stylish and effective; the i-trap 80 LED offers it all.

10 reasons to start using the i-trap 80 LED:

1. In its wall mounted position the unit is very discreet.
2. Unit can be used in a wide variety of applications.
3. Glue board discreetly placed out of sight and is easy to replace.
4. Coated steel (Metal housing) offers durability.
5. Effective coverage of areas up to 120 m².
6. Easy to service with direct access to lamp and glue board
7. Meets ISO 9001 / RoHS & the CE standard.
8. Durable quality components, industrial design.
9. High powered effective UV-A lamp.
10. 2 year full guarantee on the mechanical aspects.

LED lamps

LED technology offers clear advantages in terms of efficiency (lower energy consumption) and its footprint (compactness)

Glue boards

Insects are caught on a glue layer, which preserves them over time. The caught insects can be counted and insect species can be analysed, which offers clear advantages in an IPM approach.



Technical specifications

Area coverage (m ²)	: 120 m ² (1250 ft ²)
Light source	: 3 x 15 watt Astron UV-A LED
Type of UV lamps	: UV Lamps RoHS certified
Electrical supply (V)	: 100-240V ~ 50-60 Hz
Catch specifications	: By means of Temperature Optimized Glueboard
Power consumption	: 33 W
Weight (kg)	: 3.9
Material	: Coated steel casing and steel cover/grid
Degree of protection	: IP20 (Safe to use in dry environments)
Guarantee	: 2 years return to base
Int. building norm	: acc. EN 60335-2-59 int. std. for insect traps
Lamp life time (h)	: 25.000
Dimensions (L x D x H)	: 520 x 100 x 365 mm (20 x 4 x 13,5 inches)
CE-approval	: Yes
Mounting position	: Wall mounted
Cable & plug	: Included
Manual:	: Enclosed with the unit in English
Service	: Unit can be serviced without special tools

(*) after 25.000 hours a loss of 30% in efficiency has to be expected and lamps need to be replaced

